



Managing Enterprise IP Telephony Performance

Alan Clark,
President & CEO
Telchemy®, Incorporated

alan.clark@telchemy.com


Agenda

- Voice over IP Performance Problems
 - Voice quality
 - IP problems
 - Non-IP problems
- VoIP Performance Management Framework
- RTCP XR
- Defining Requirements
- Summary

VoIP Performance Problems

- Connectivity problems
- Voice quality
 - What affects it?
 - How to measure it?
 - What do users notice?
- IP-related problems
- Signal, Noise, Echo problems

Connectivity Problems

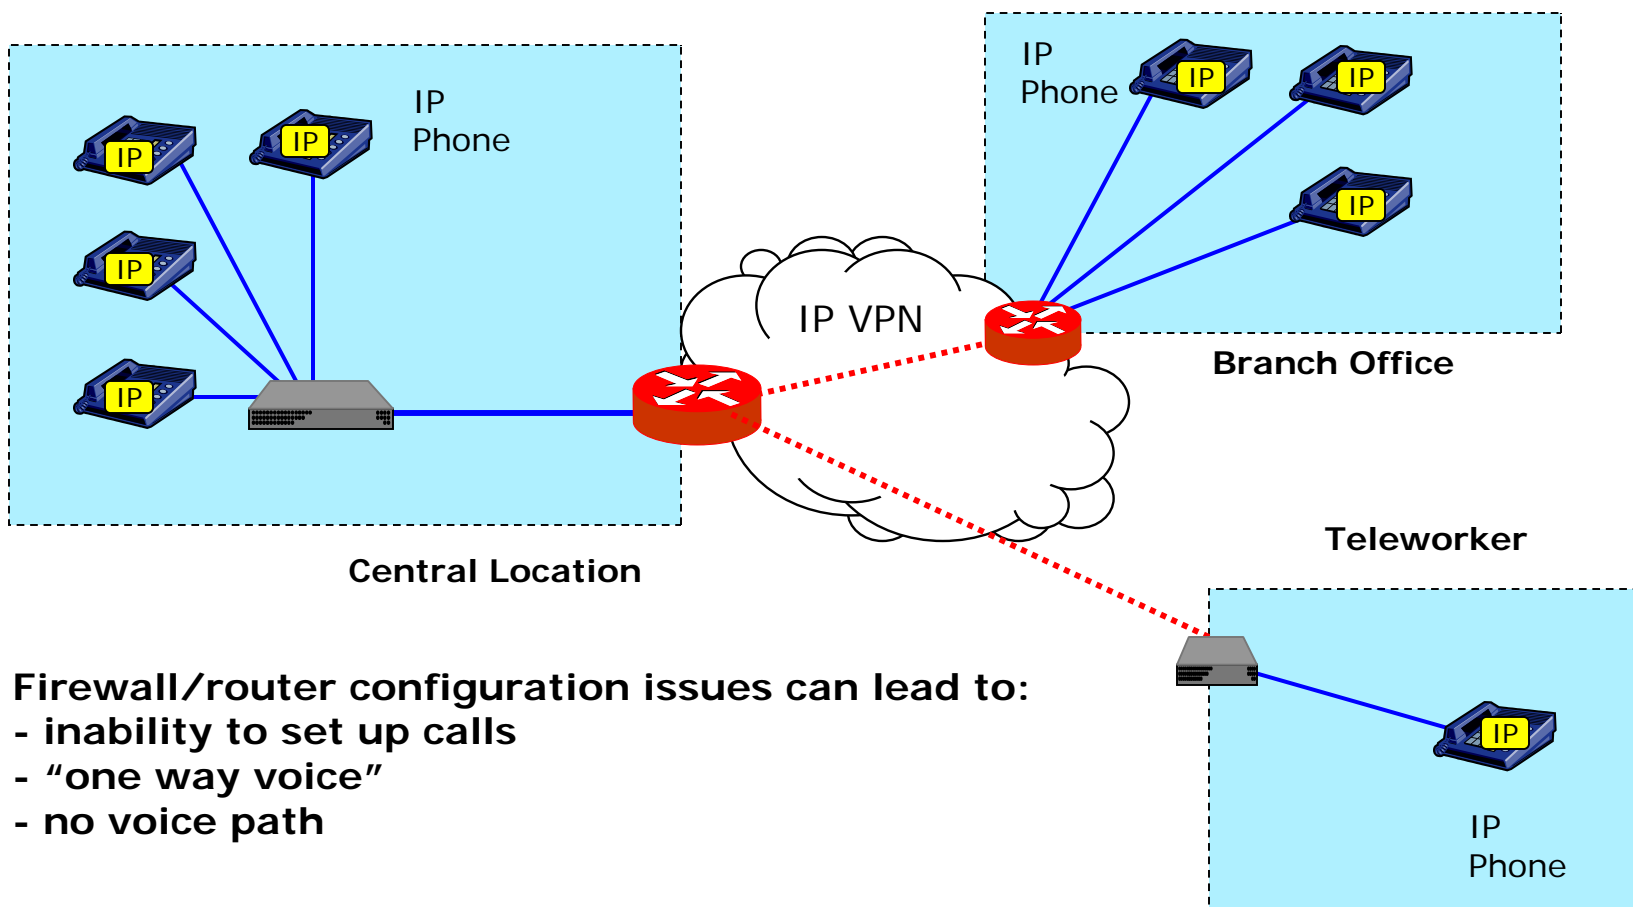


Firewall/router configuration issues can lead to:

- inability to set up calls
- "one way voice"
- no voice path


IP Performance Issues and Problems

- The “mantra”
 - Packet Loss -- Leads to quality degradation
 - Jitter -- Leads to packet loss (discards)
 - Delay -- Causes conversational difficulty
- But ...

Teleworkers, Branch Offices & Call Centers

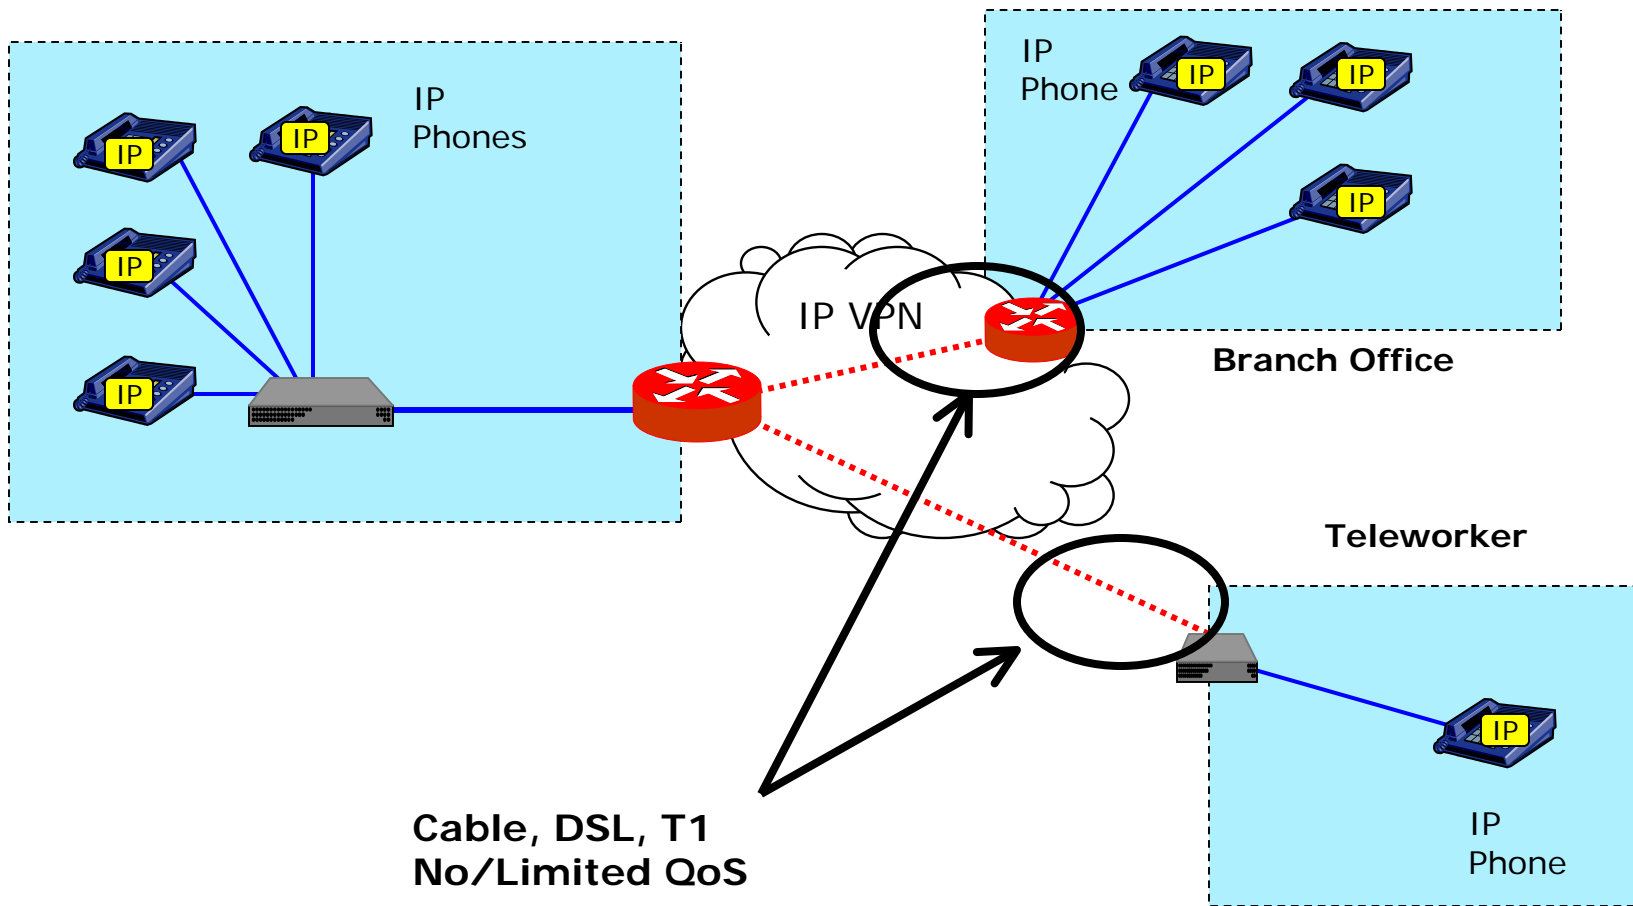

Leads To Transient IP Problems

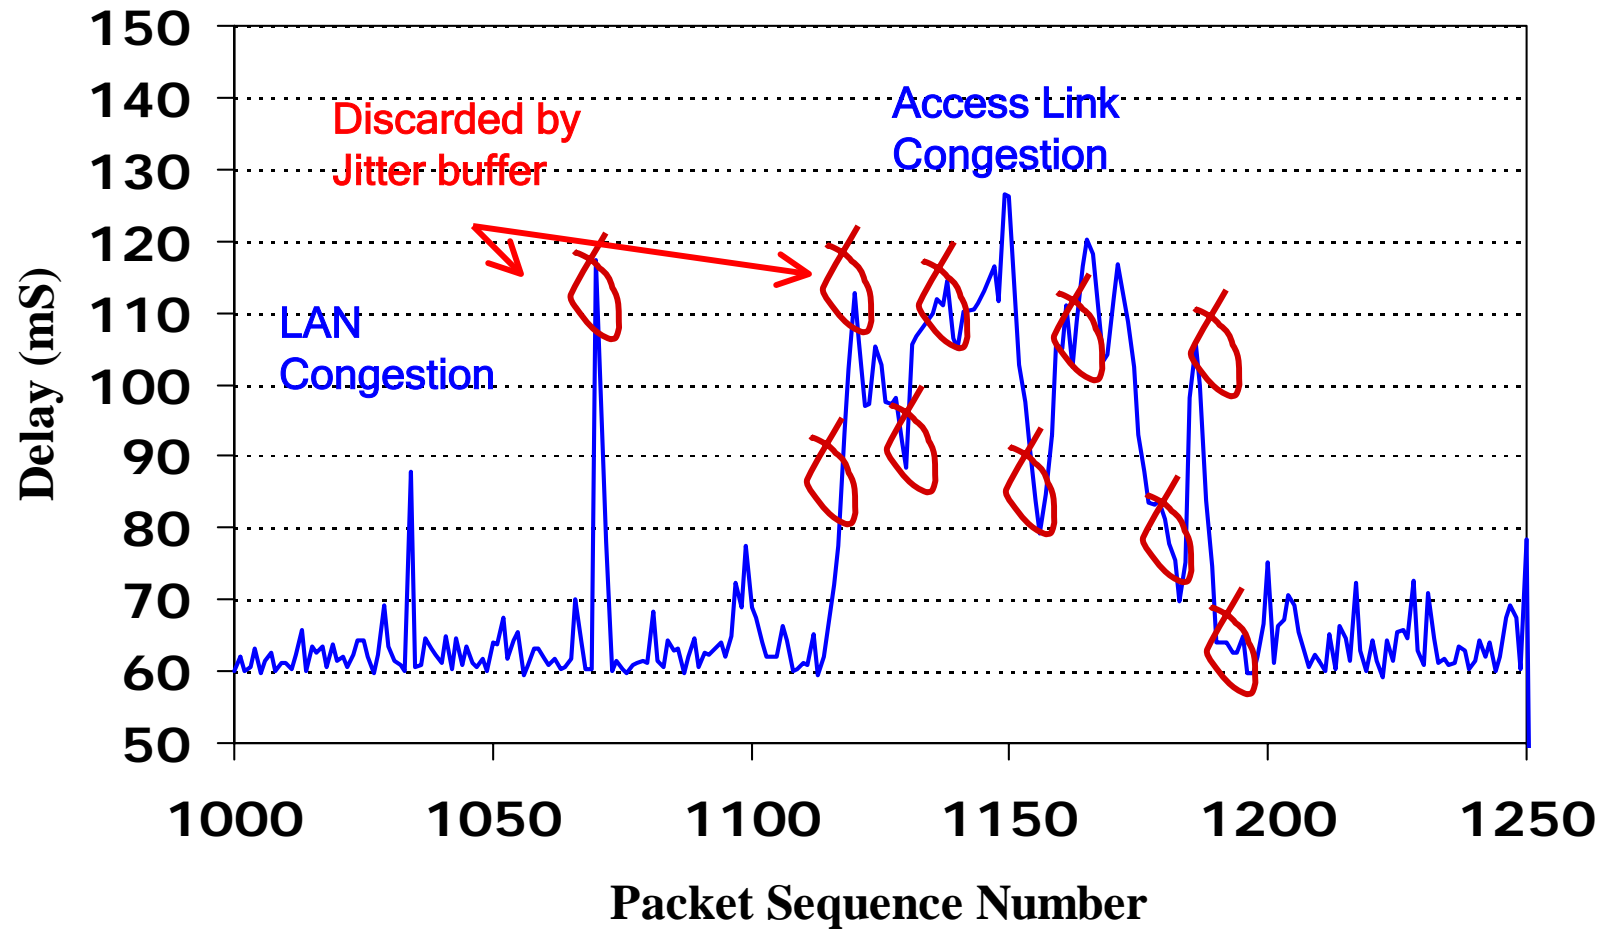


Packet Loss and Discard


- Loss and discard are typically due to network congestion
- Congestion is time varying (e.g., file downloads) ...
- ... therefore loss and discard are “bursty”
- Typical loss/discard condition -- bursts of 20-30% loss rate lasting 1-2 seconds

- *What does this mean to the user?*


Leads To Time Varying Call Quality

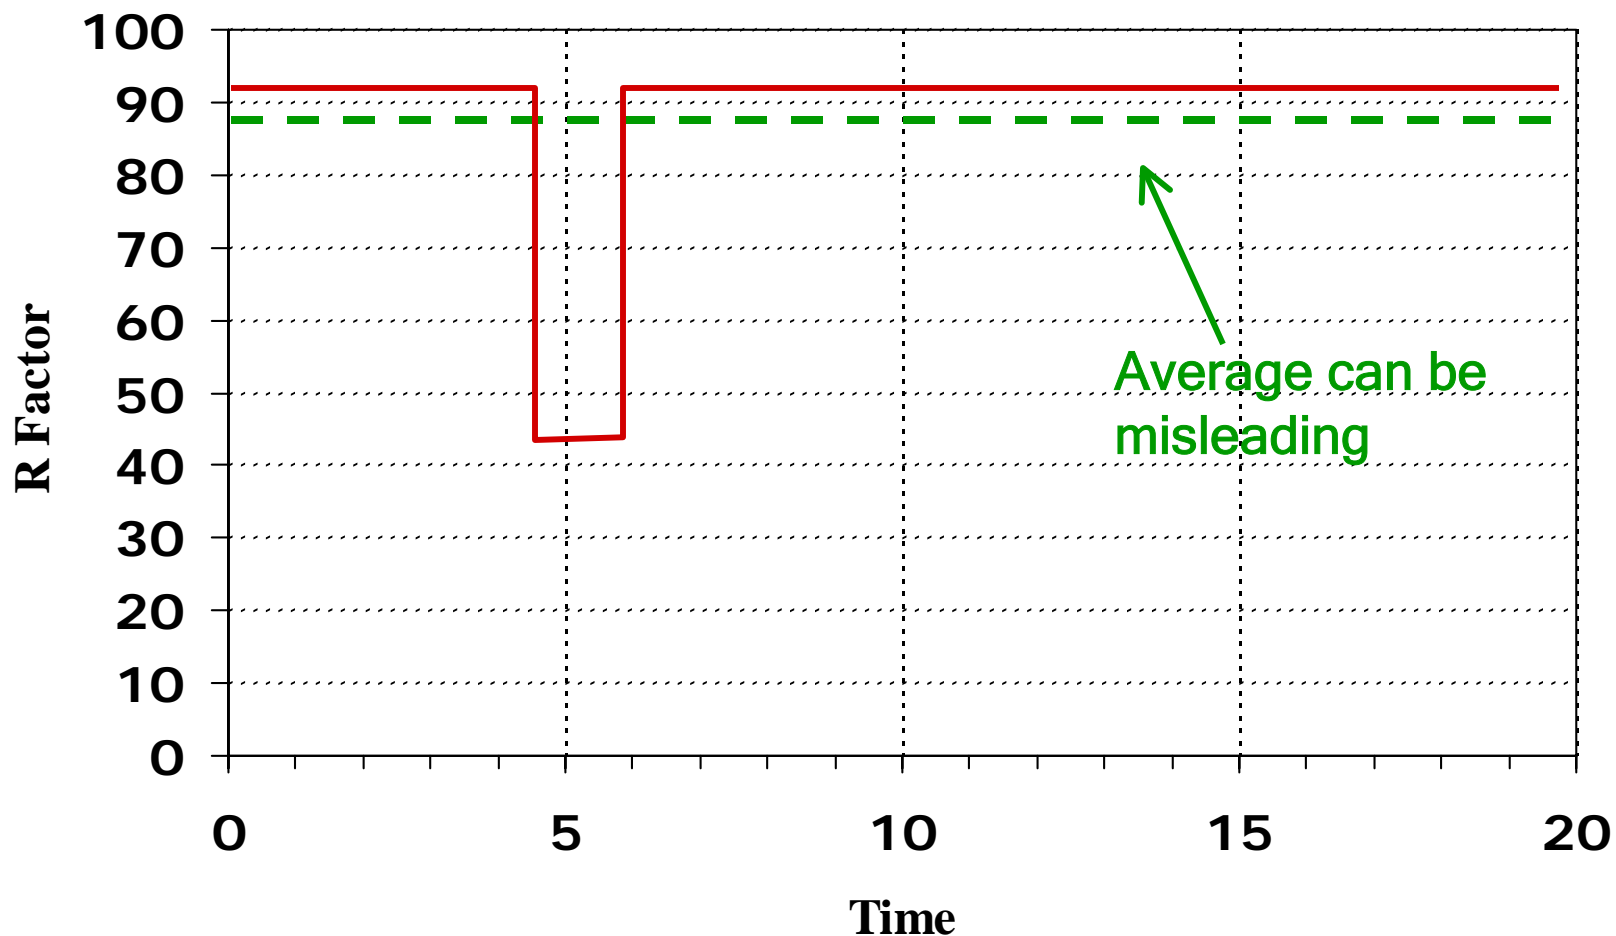

Signal, Noise and Echo Problems

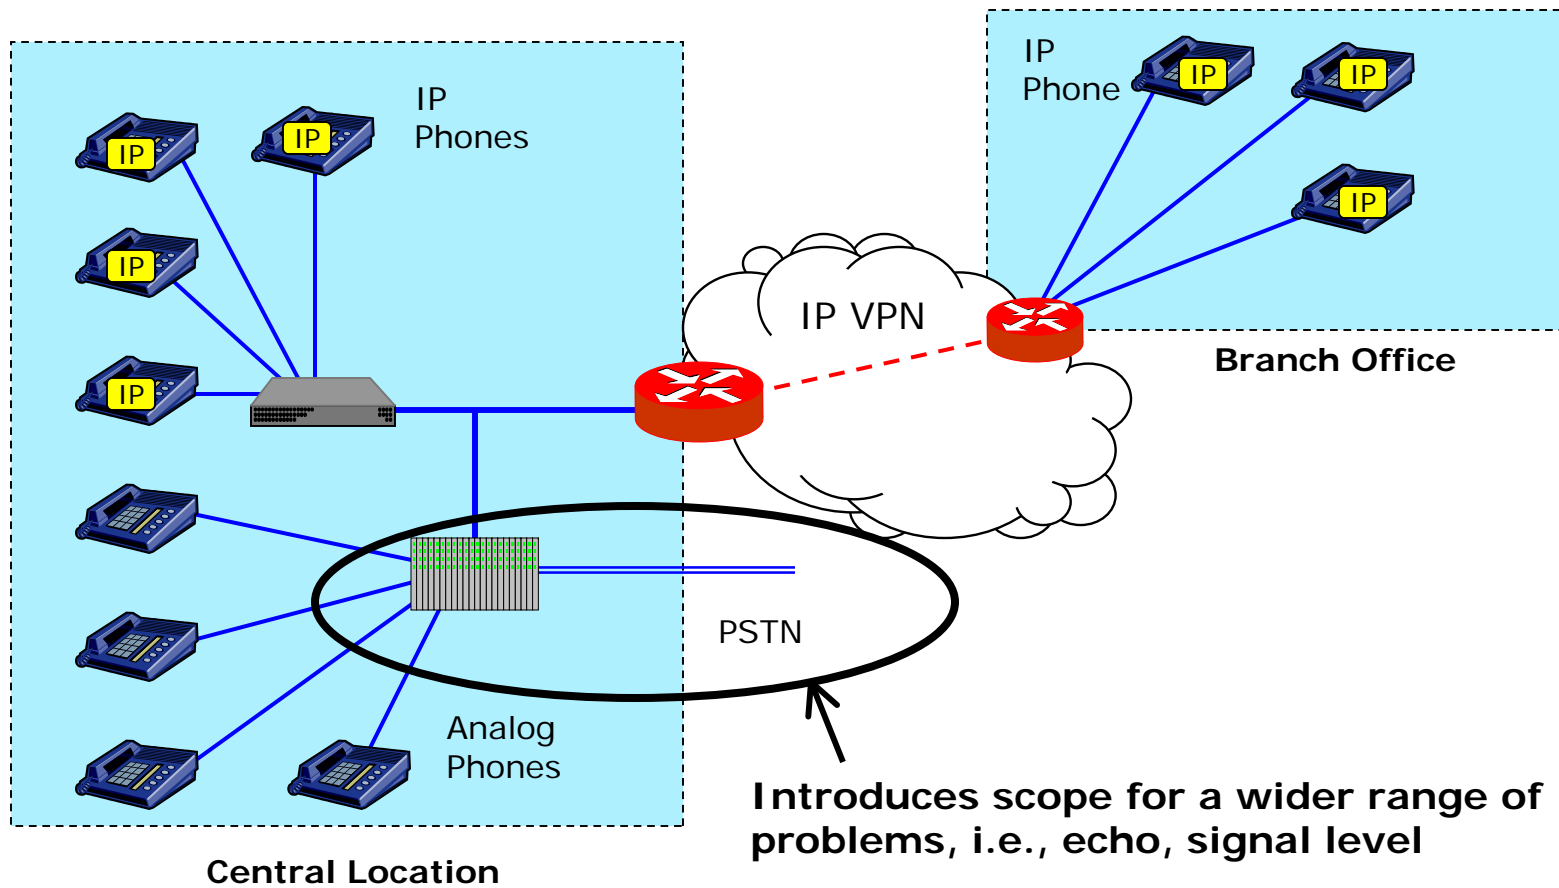


Echo Problems

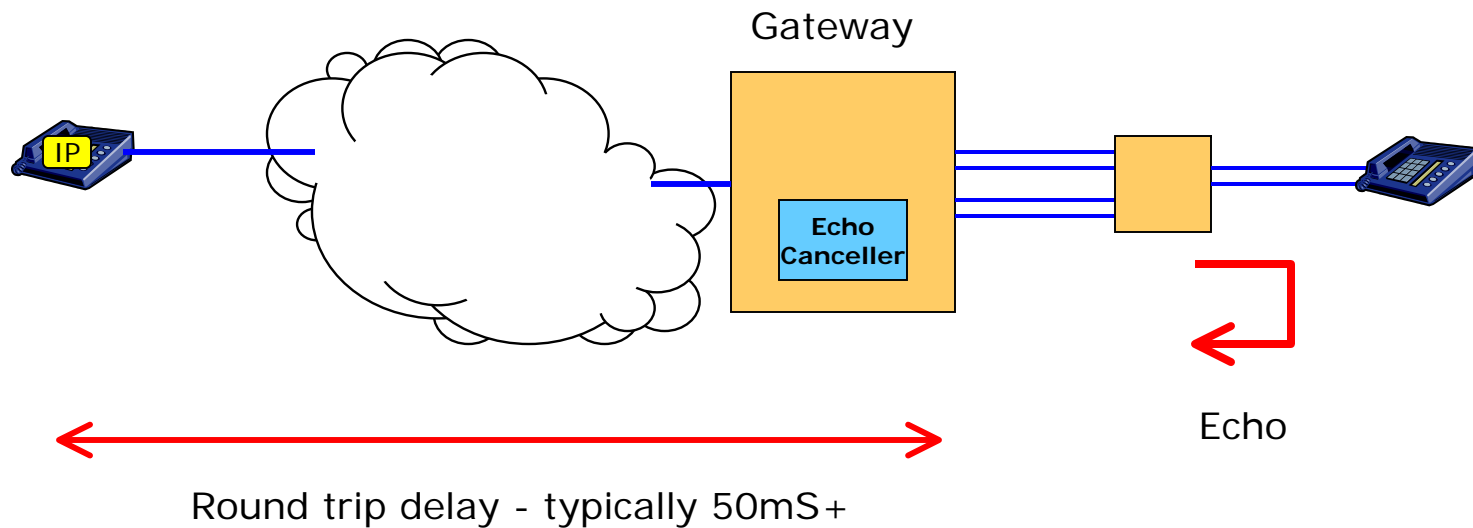

Additional delay introduced by VoIP makes existing echo problems more obvious

Signal Level Problems

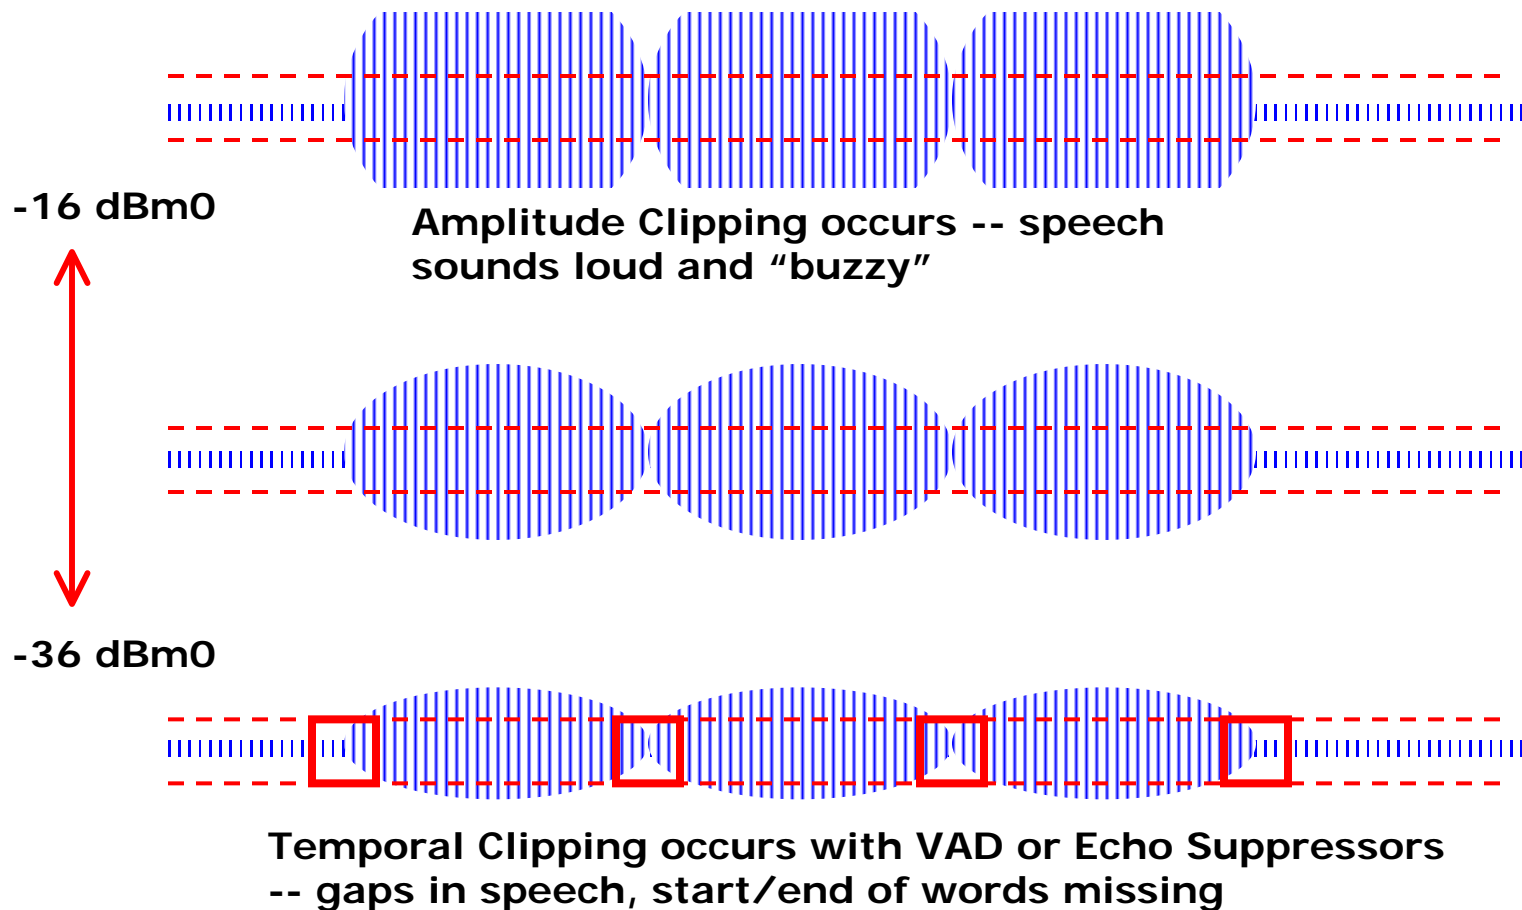

Measuring Signal, Noise and Echo Levels?


Method 1 - Active Test

- Attach test system to voice port, make a call and analyze
- Suitable for diagnosis when you know there is a problem

Method 2 - Passive Monitoring

- "Traditional" -- decode voice stream and analyze
 - Expensive
 - Doesn't work with encrypted voice traffic
- "Embedded" -- end-system already has access to this data, make it available
 - Inexpensive
 - Will work with any security policy

VoIP Performance Management Framework

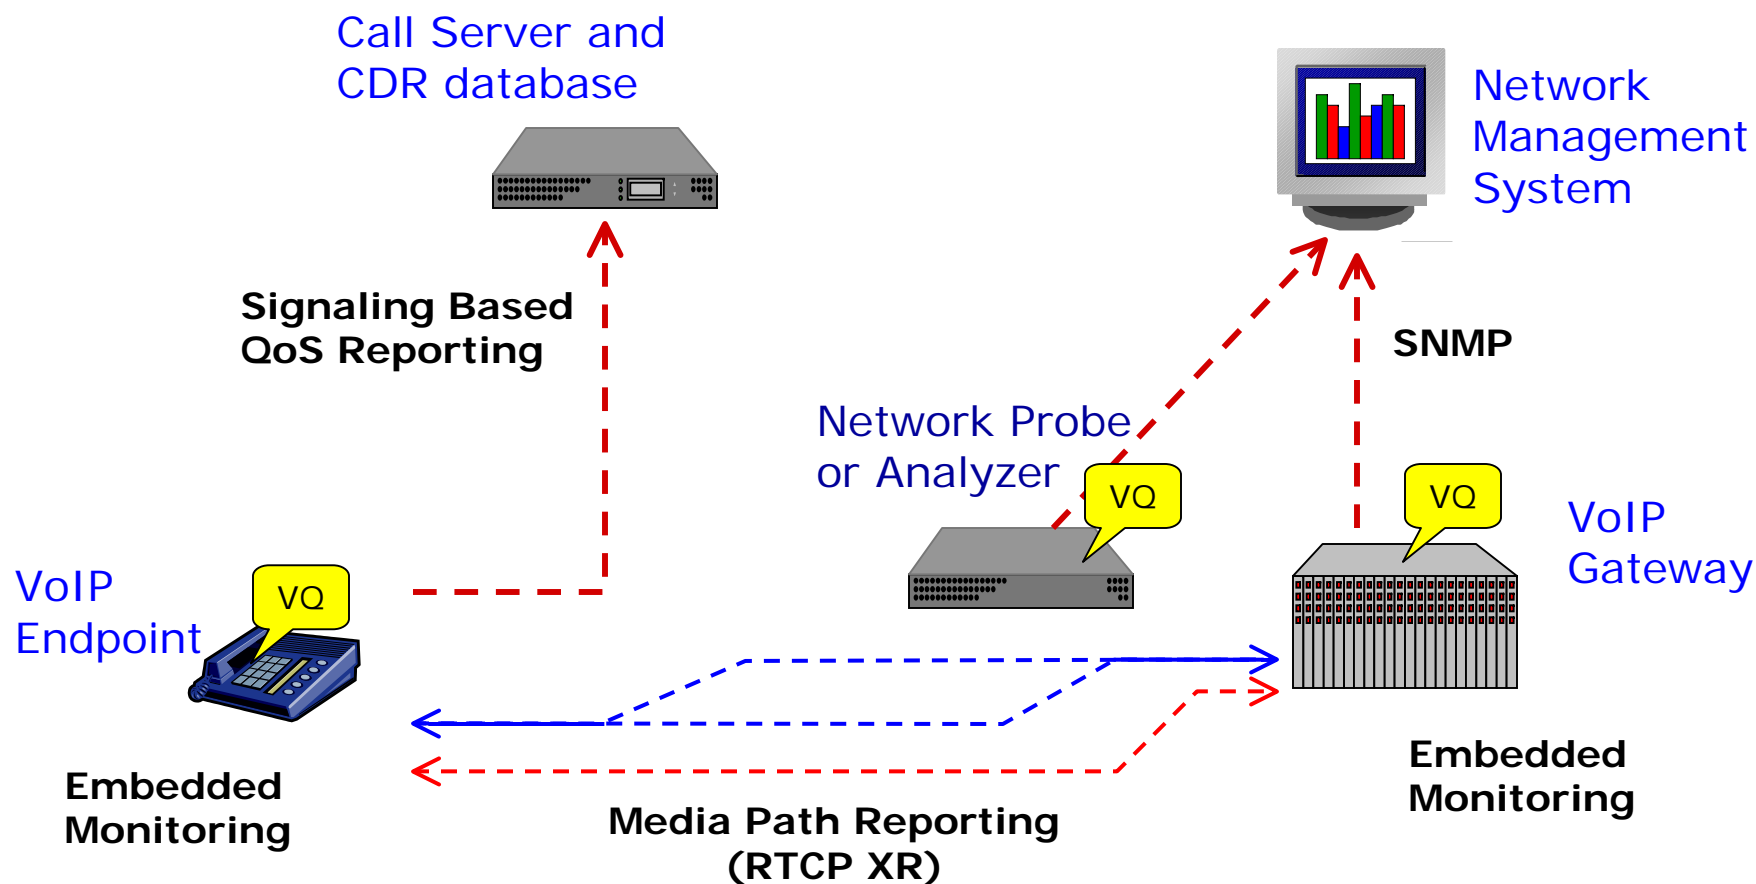


RTCP XR

Loss Rate	Discard Rate	Burst Density	Gap Density
Burst Duration (mS)		Gap Duration (mS)	
Round Trip Delay (mS)		End System Delay (mS)	
Signal level	RERL	Noise Level	Gmin
R Factor	Ext R	MOS-LQ	MOS-CQ
Rx Config	-	Jitter Buffer Nominal	
Jitter Buffer Max		Jitter Buffer Abs Max	

RTCP XR-Based Protocols

- Media Path
 - RFC3611 RTCP XR -- published Nov 2003
- Signaling
 - SIP QoS Reporting -- draft, final by end Dec 04
 - H.323 reporting (H.460.9) -- published Apr 04
 - Megaco reporting (H.248.30) -- published Apr 04
 - MGCP -- not yet started
- SNMP
 - RTCP XR MIB -- draft, final by March 05

Enterprise Application Using New Framework

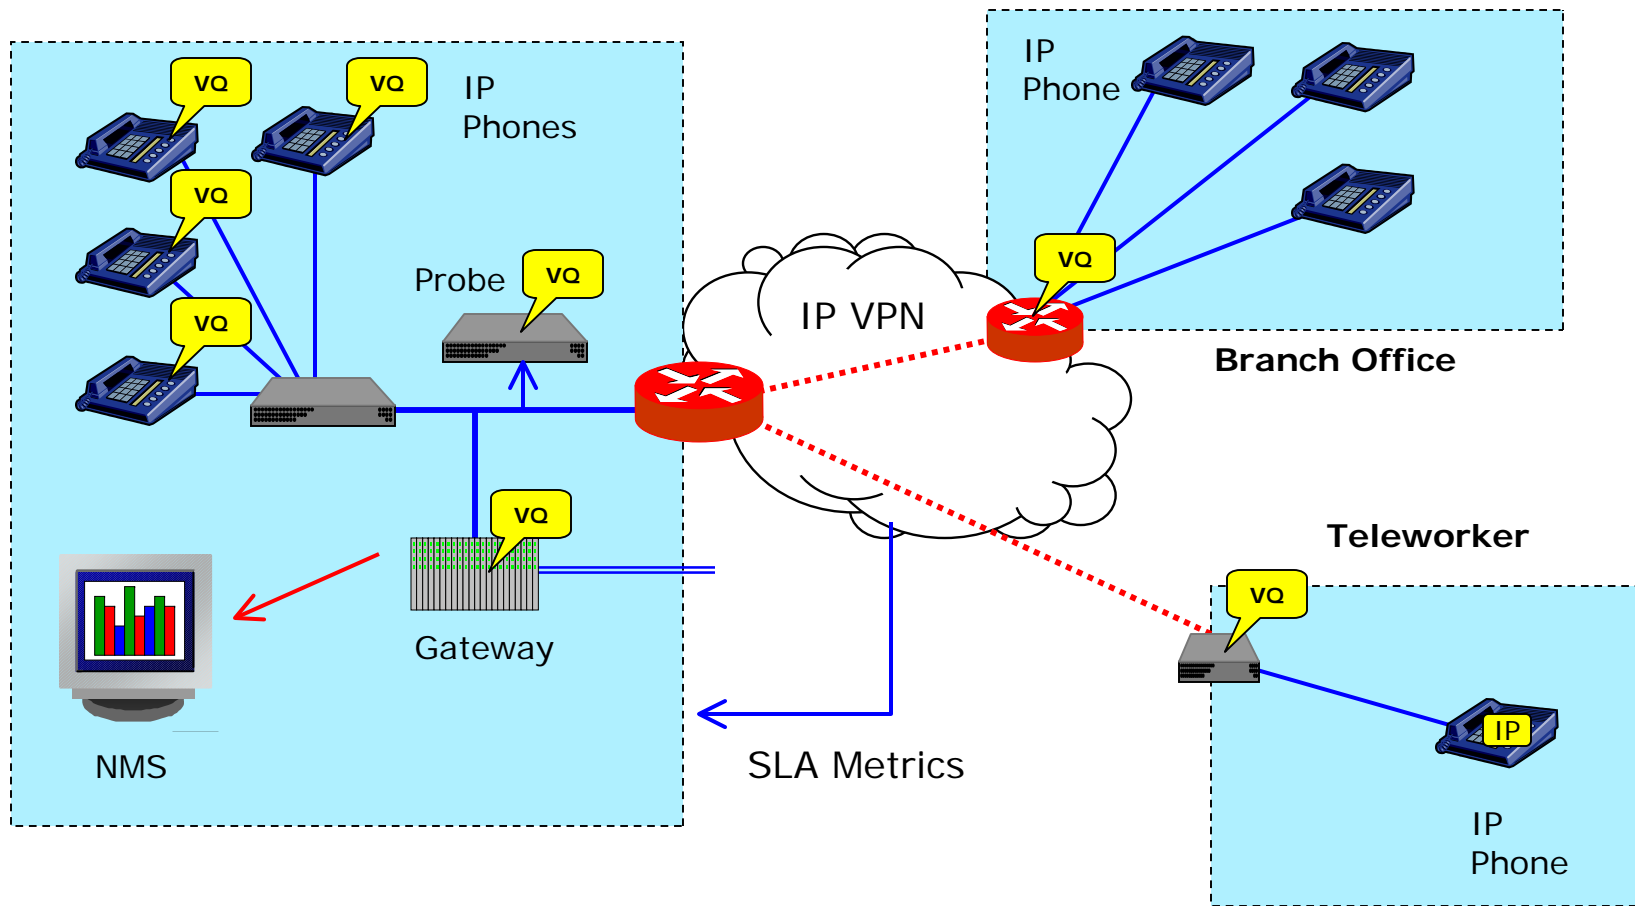

Defining Requirements

- Do predeployment testing!!
- Request support for RFC3611 VoIP Metrics in IP Phones and Gateways
- Use same monitoring technology in IP endpoints, probes and analyzers
- Use VoIP Performance Management Framework
- Request SLA metrics from service providers that are meaningful for VoIP
- Remember that IP problems are transient!!

Summary

- Voice over IP Performance Problems
 - Voice quality
 - IP problems
 - Non-IP problems
- VoIP Performance Management Framework
- RTCP XR
- Defining Requirements

Telchemy Overview

- Leading provider of technology for VoIP Fault & Performance Management
- Products deployed for 3 years; widely used by Enterprise and Service Providers
- Multiple patents/applications
- Led development of VoIP performance reporting standards in IETF and ITU
- Widely recognized as “Subject Matter Experts” on VoIP performance